

Fig. 1


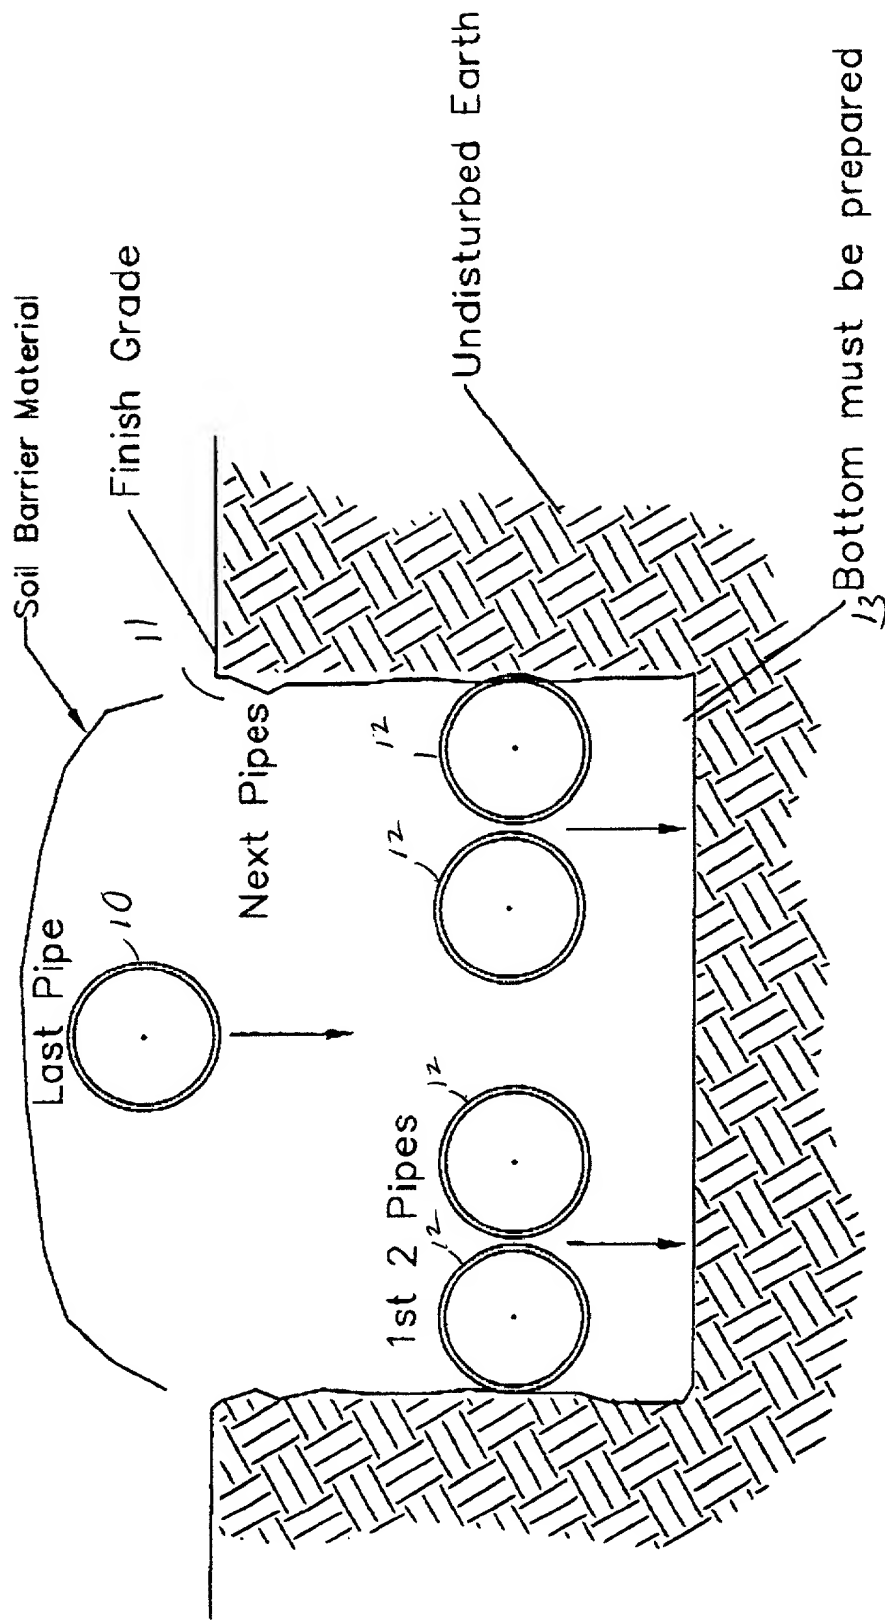


FIG. 5

THE LOW PROFILE - 56/P EFFLUENT DISTRIBUTION SYSTEM END VIEW

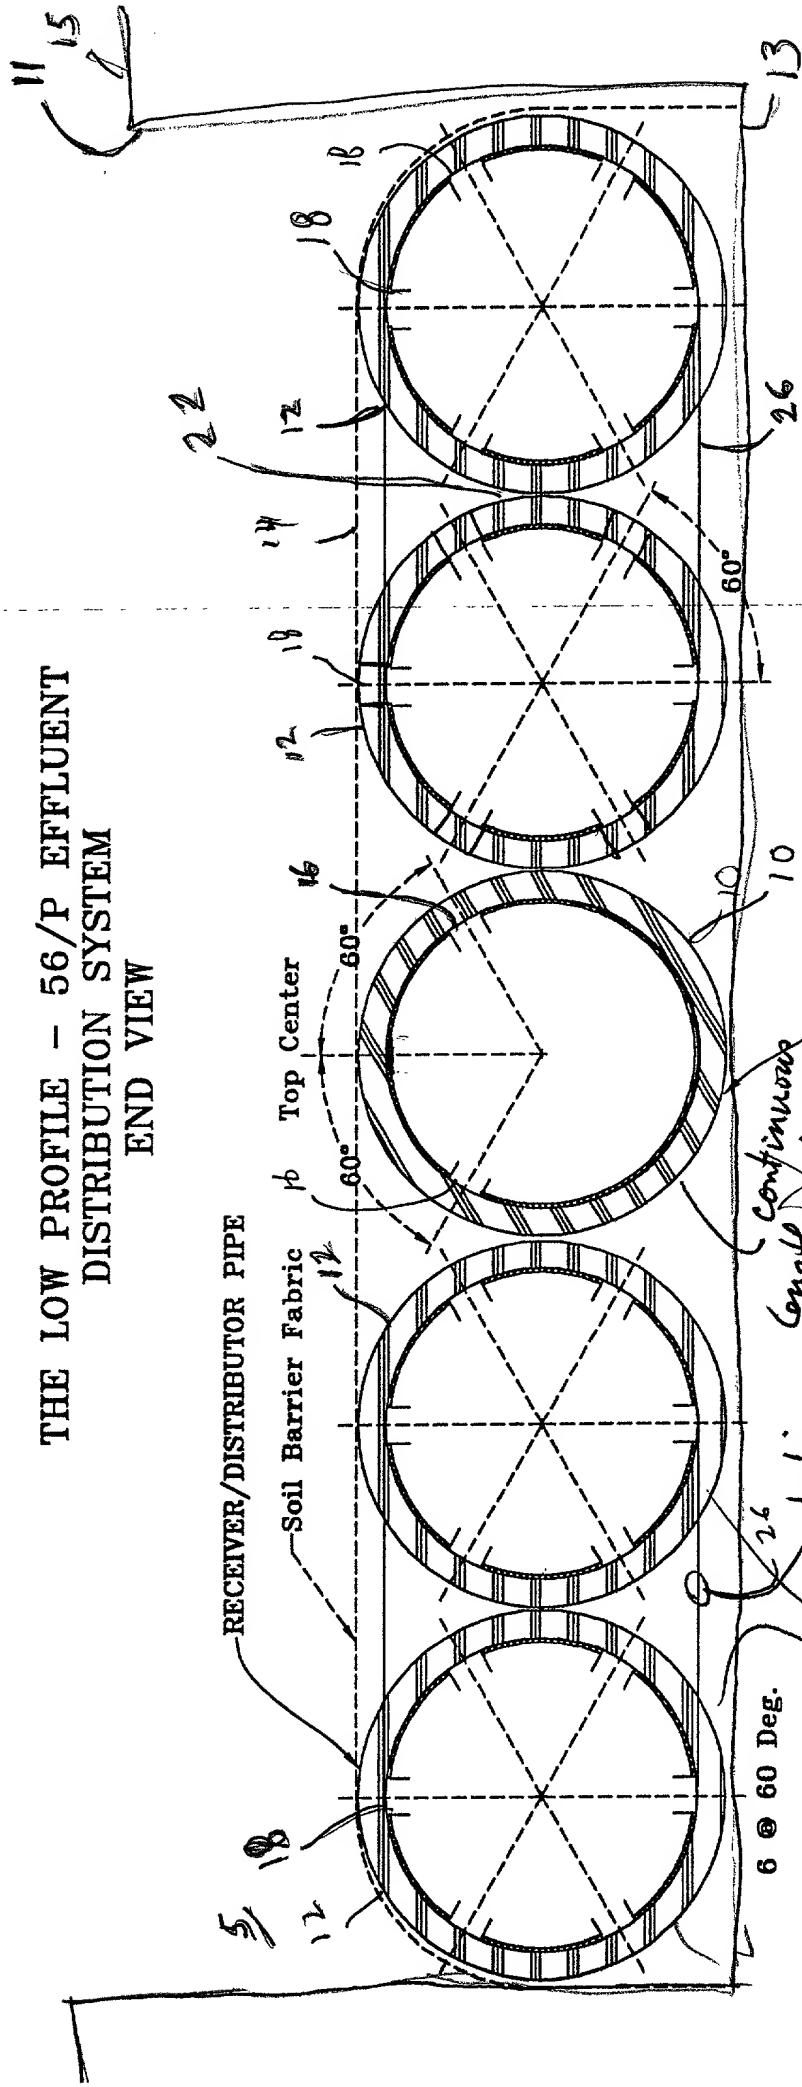

6 @ 60 Deg.

plastic
bunding.

2 pipes bundled -

can be 20' length

continuous
length cut to length from coil.

Polishing Pipe Has Three Holes

Hole Dimensions = 7/16" Min. - 3/4" Max. Diameter

Hole Timing = 60 Degree Centers

Receiver/Distributor Pipes Have Six Slots Per Valley

Slot Dimensions = .750 Long x .125 Wide

Slot Timing = 60 Degree Centers

FIG. 6

[illegible]

FIG. 8

END VIEW


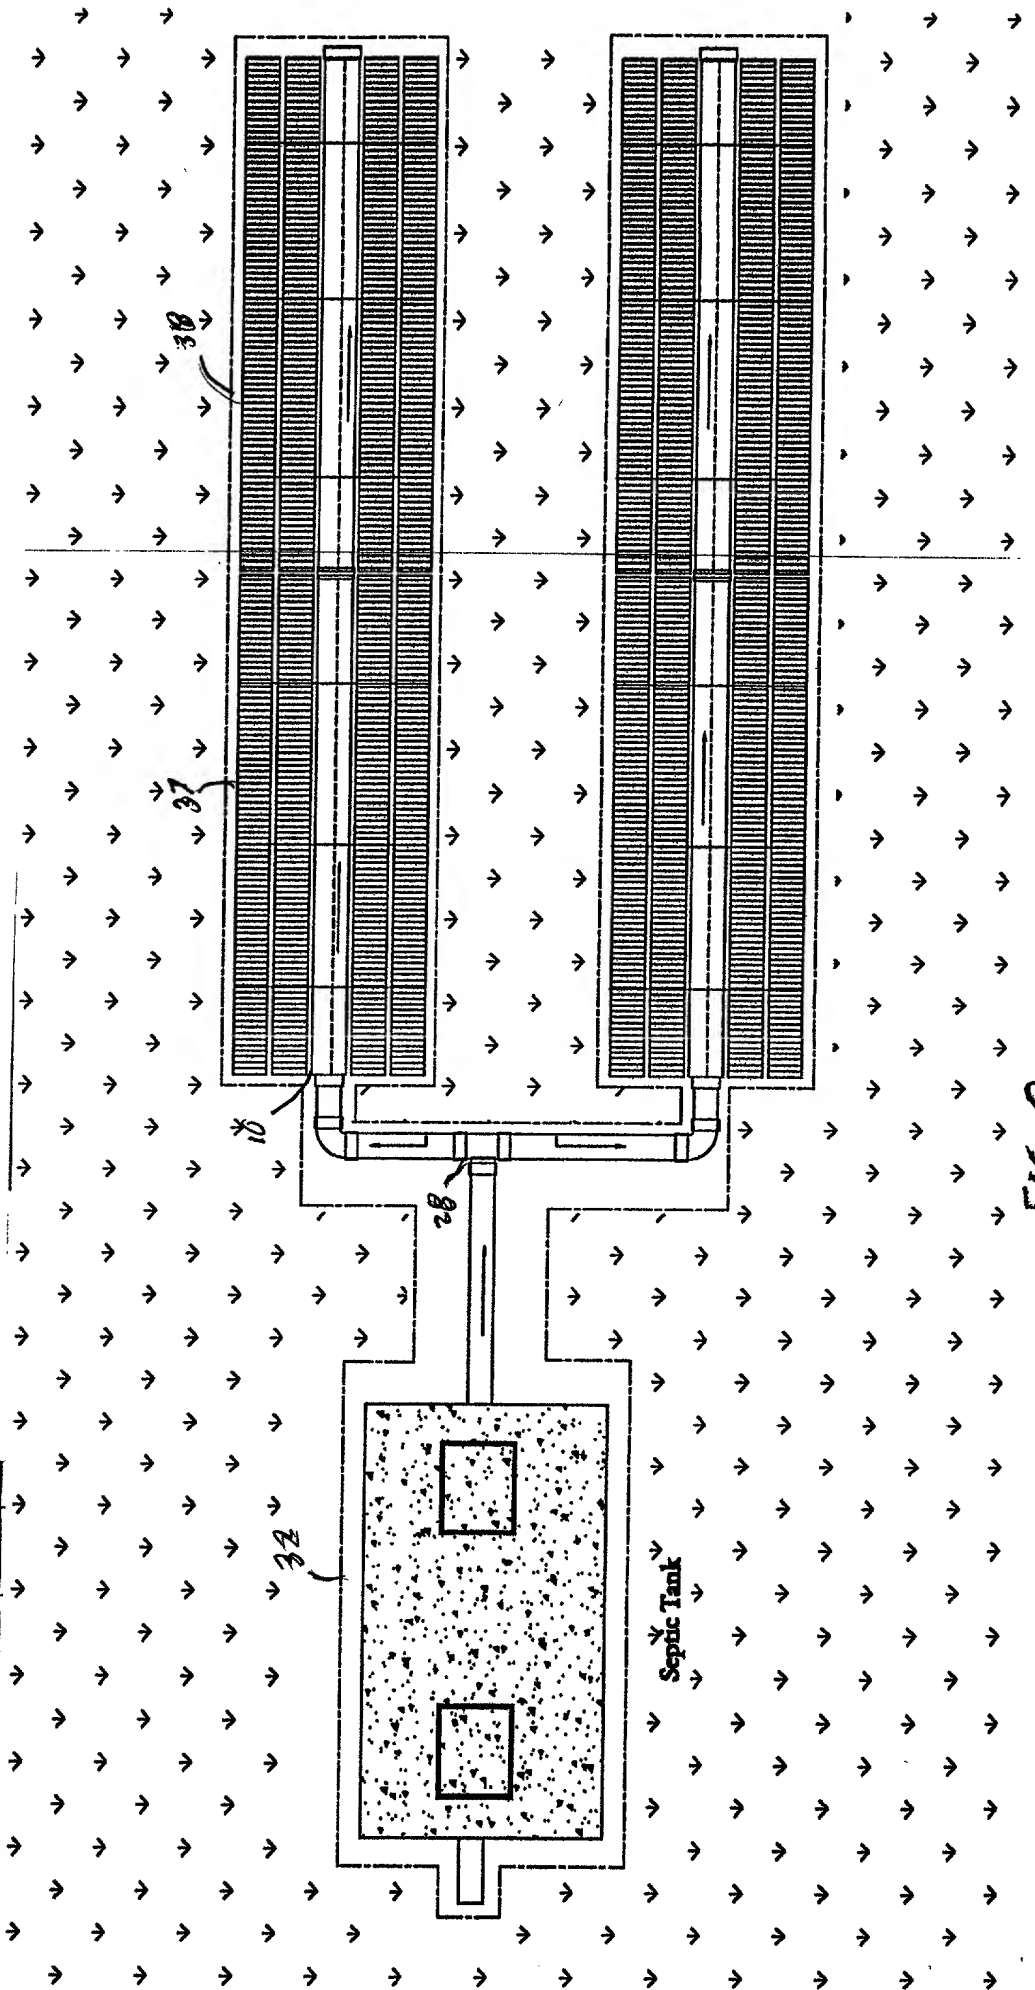


FIG. 8

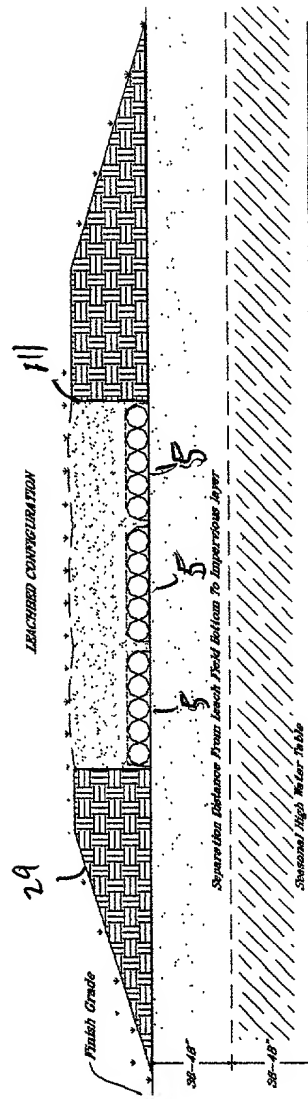

Elevated Or Raised Mound System

FIG. 9

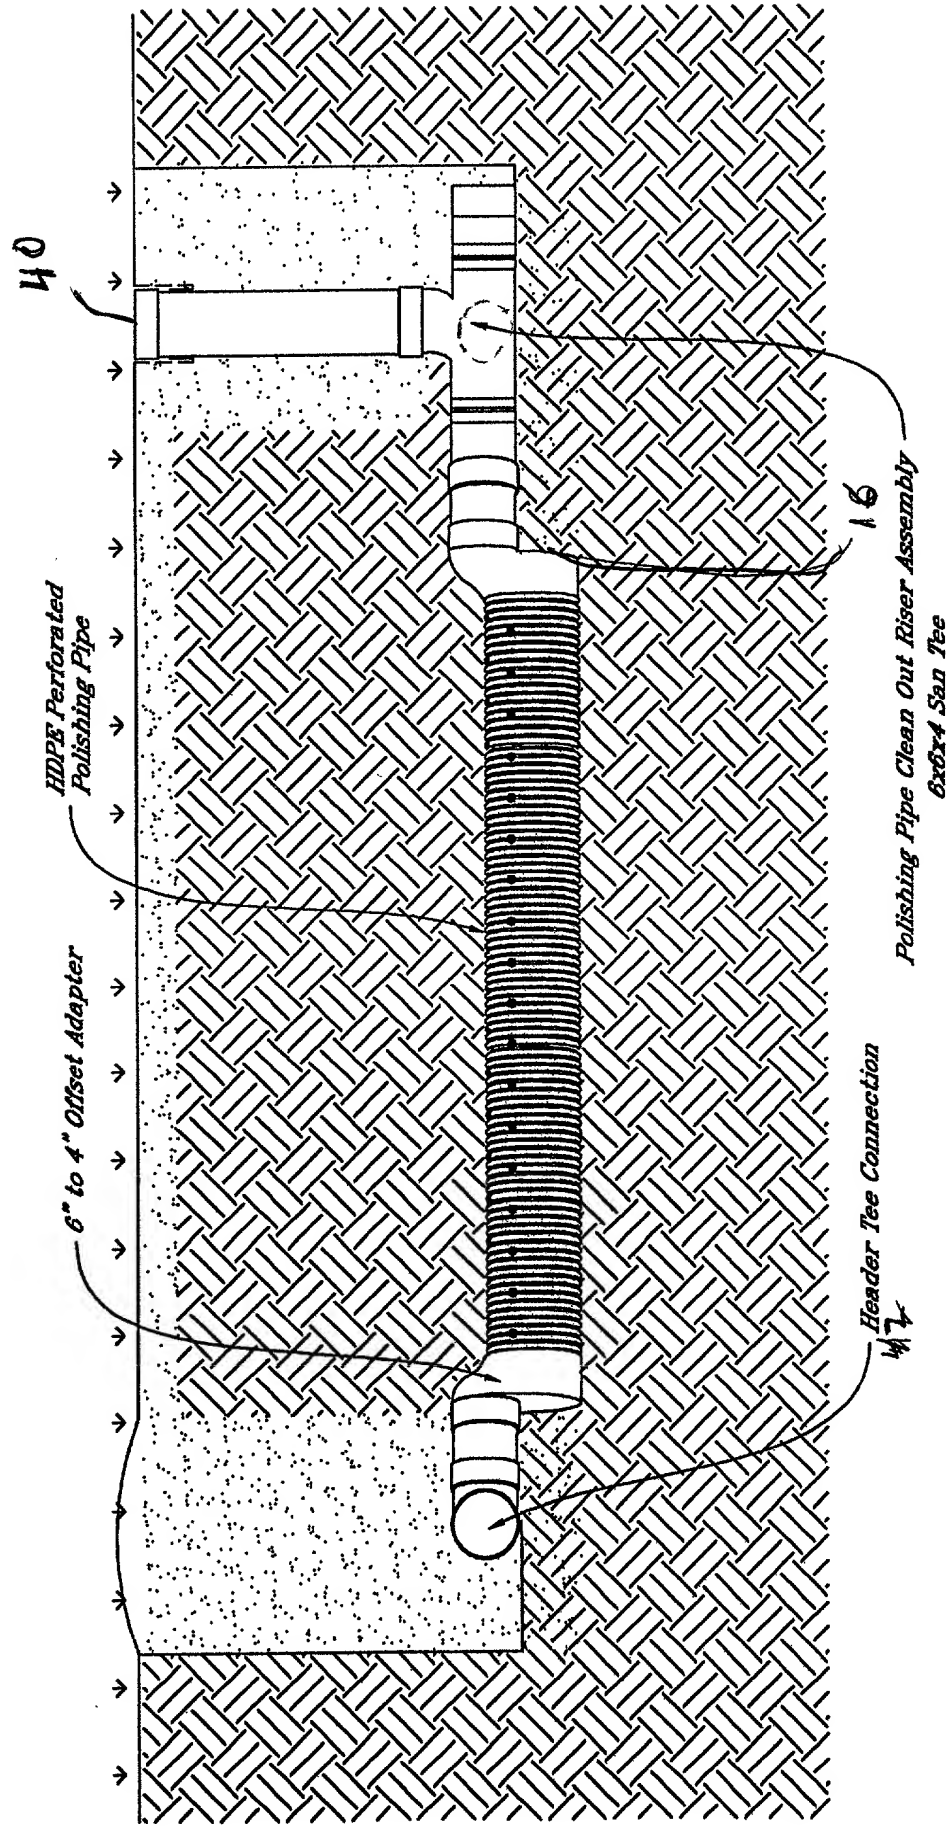


FIG. 10

FIG. 10



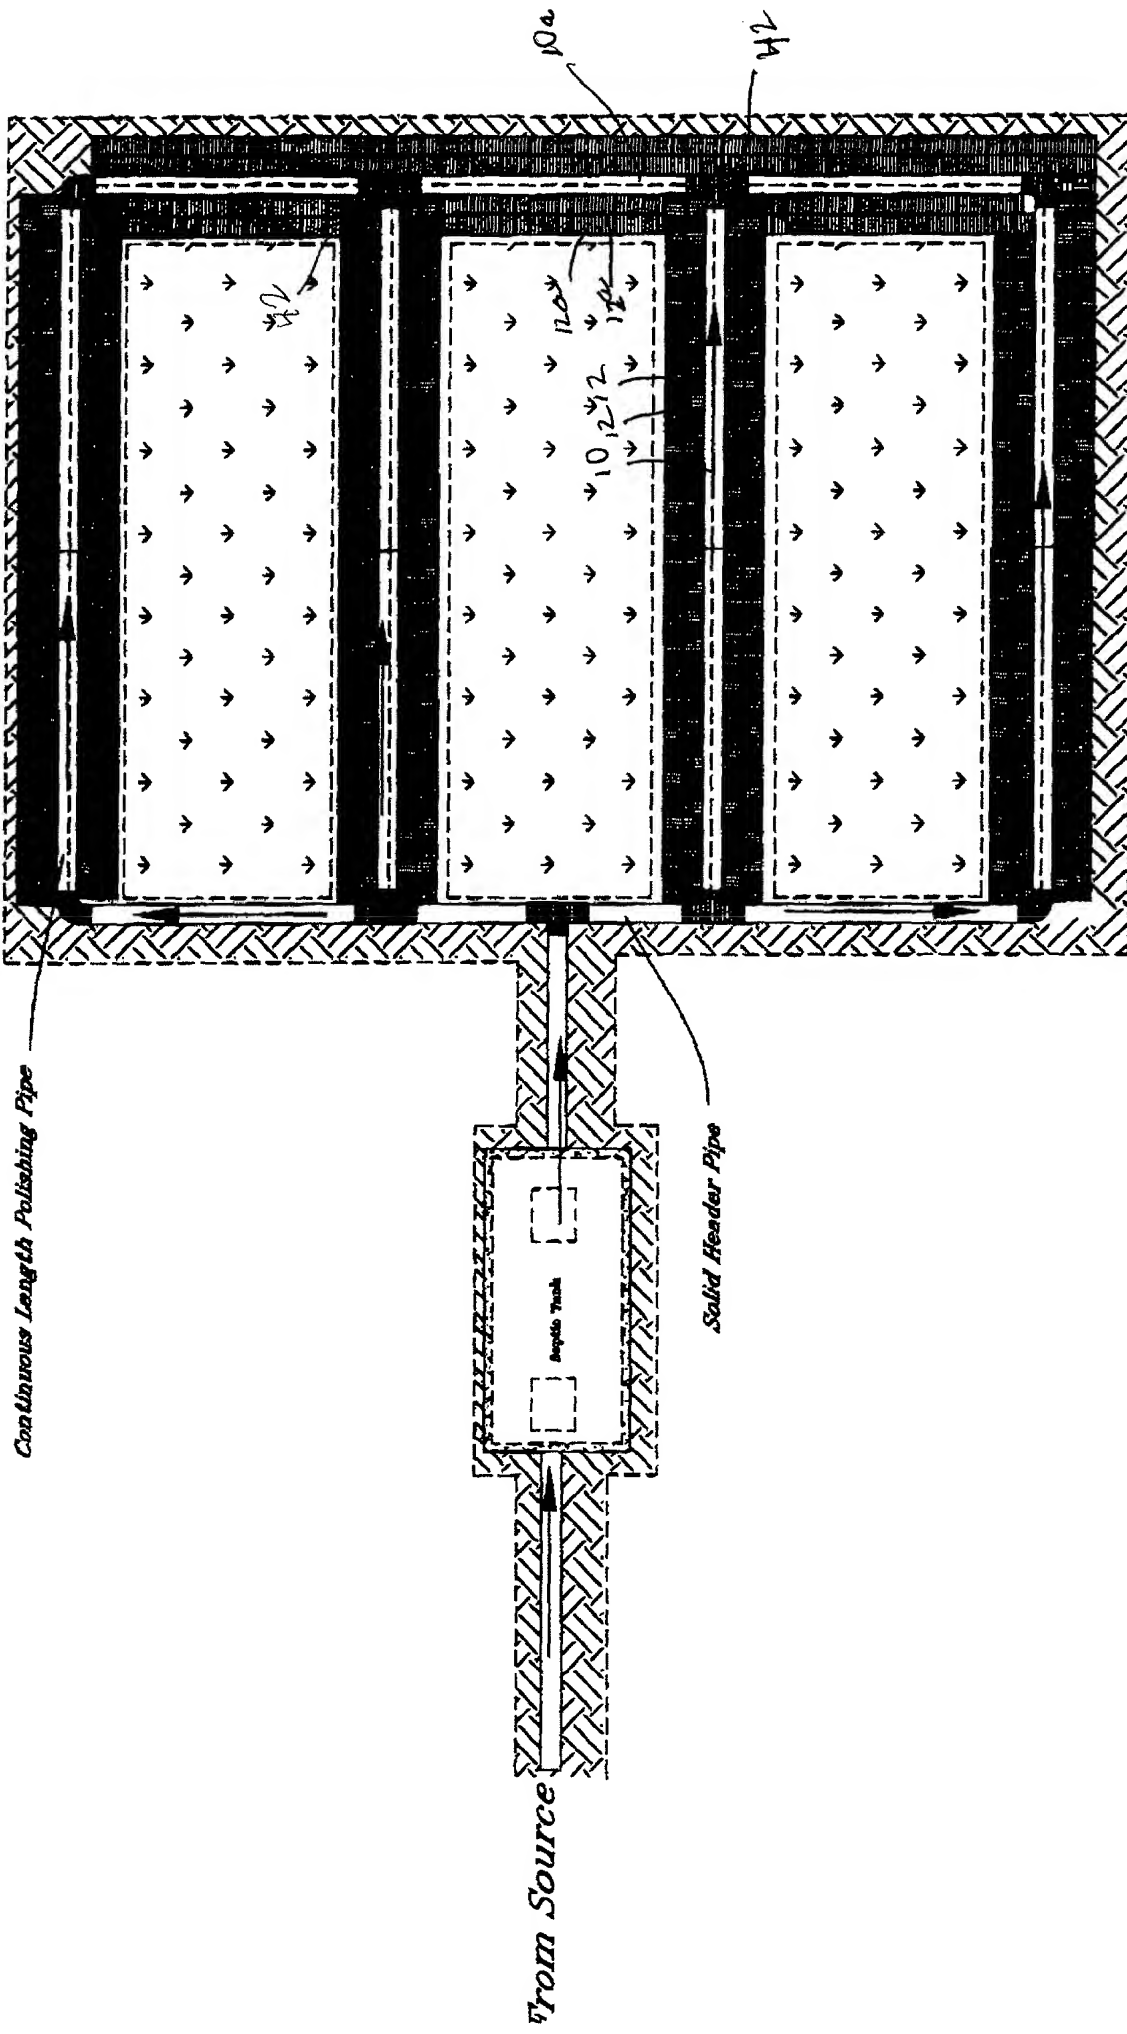


FIG. 11

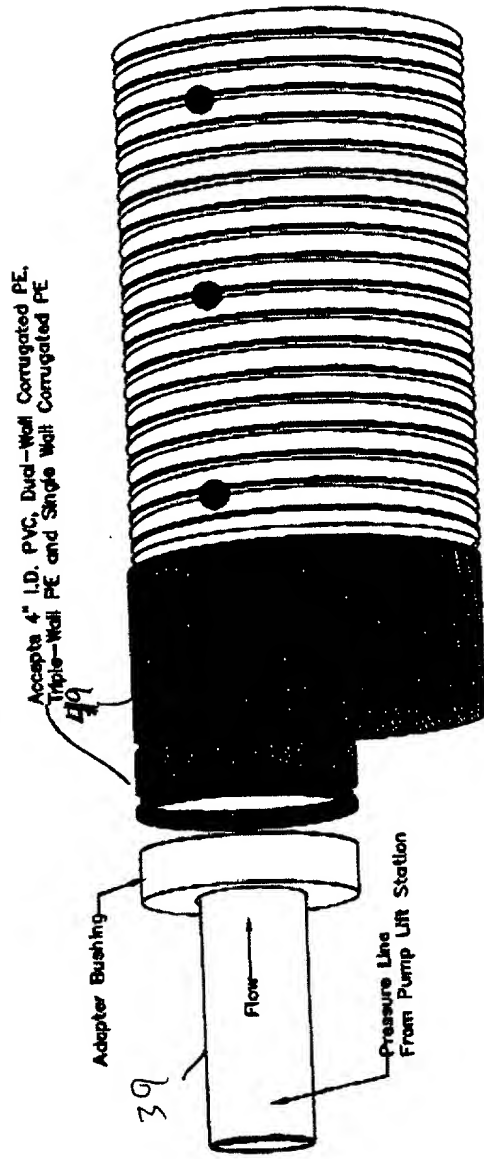

Typical Offset Adapter

FIG. 12

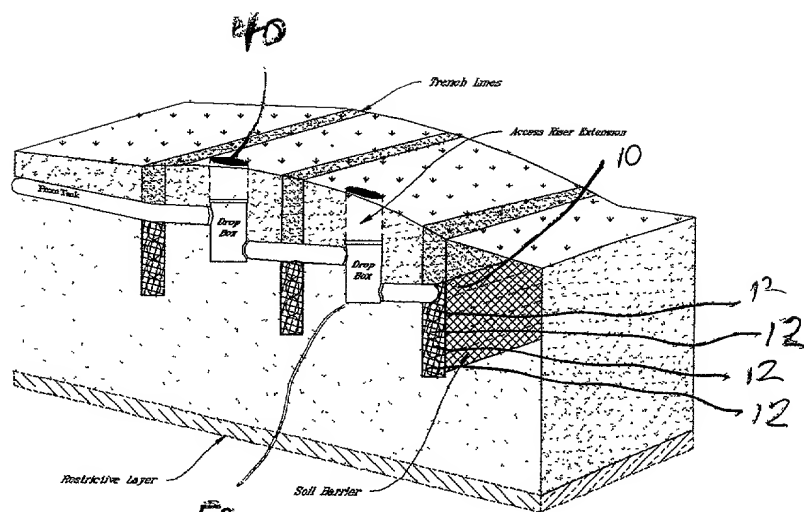

TYPICAL NARROW TRENCH, HILLSIDE, VERTICAL INSTALLATION

FIG. 13

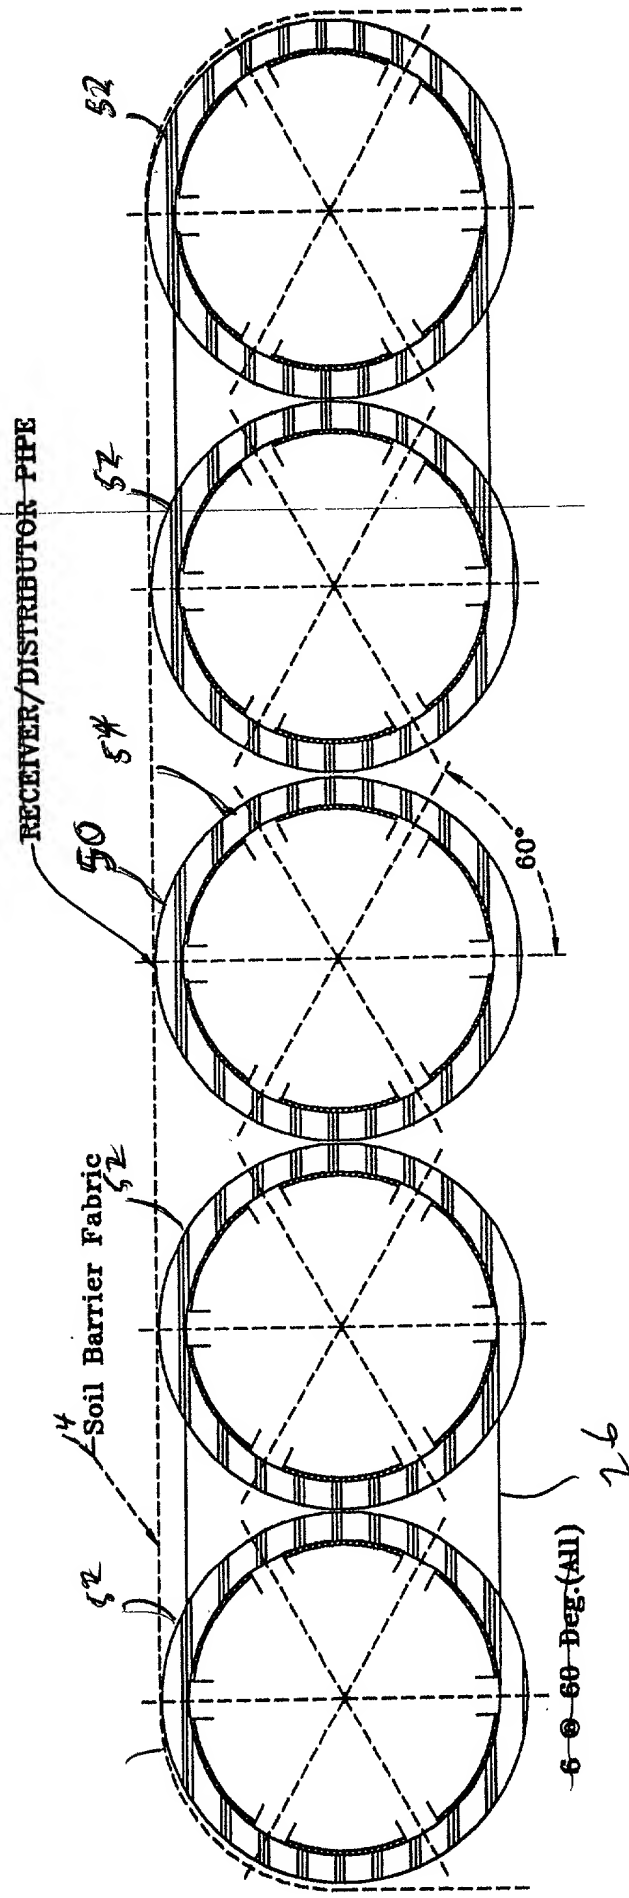


FIG. 14

09983672 404804

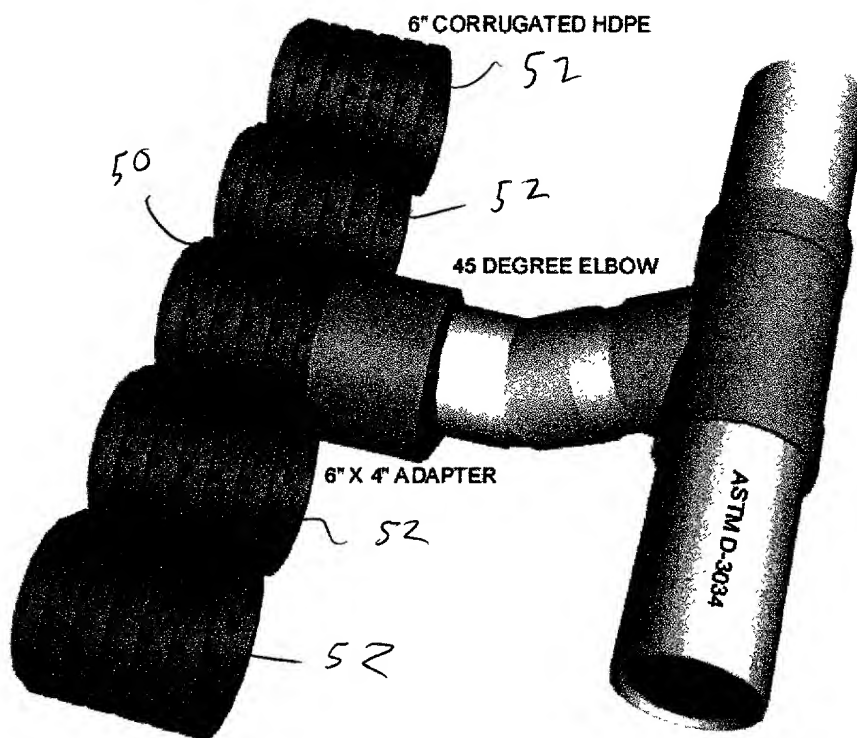
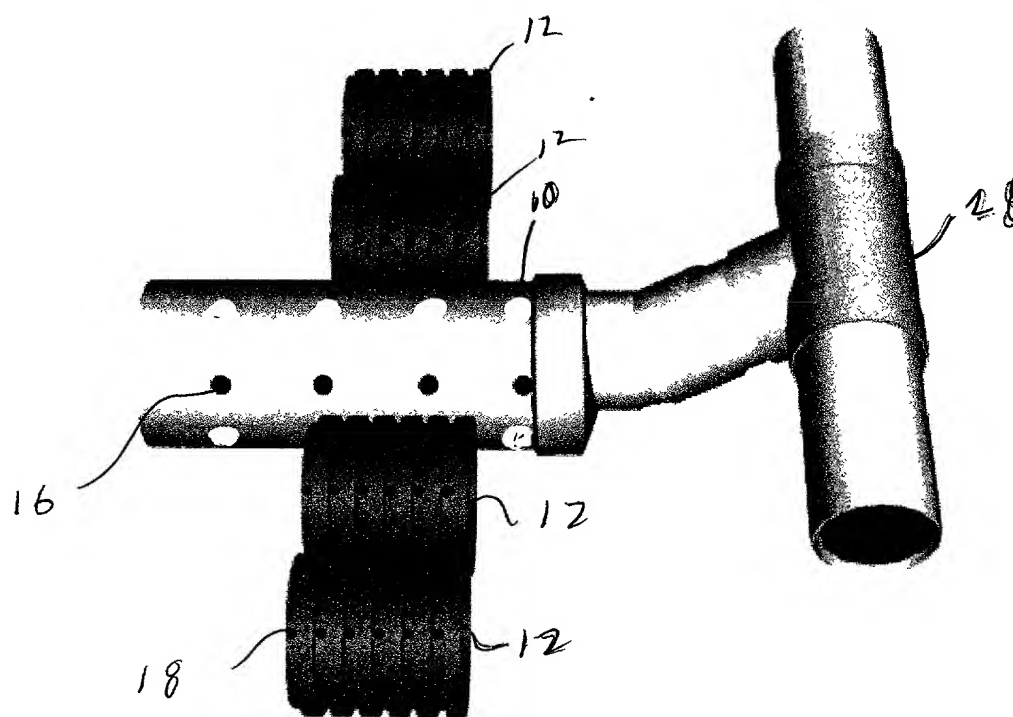


FIG. 15

Typical Distribution Box Method

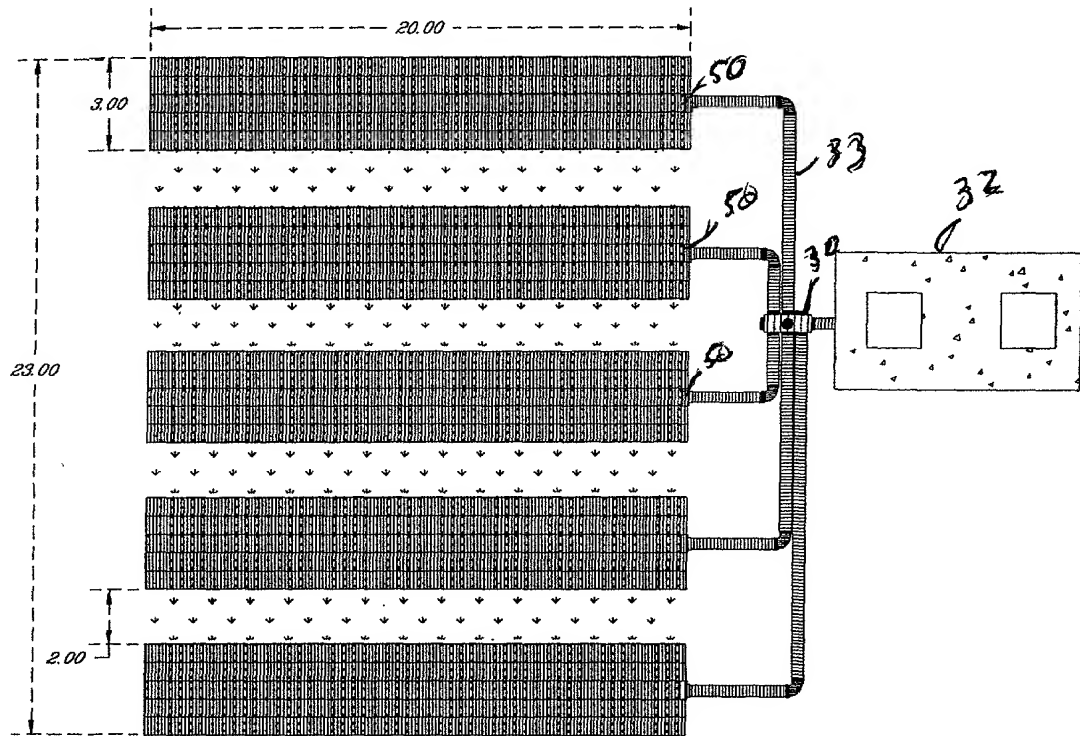


FIG. 16

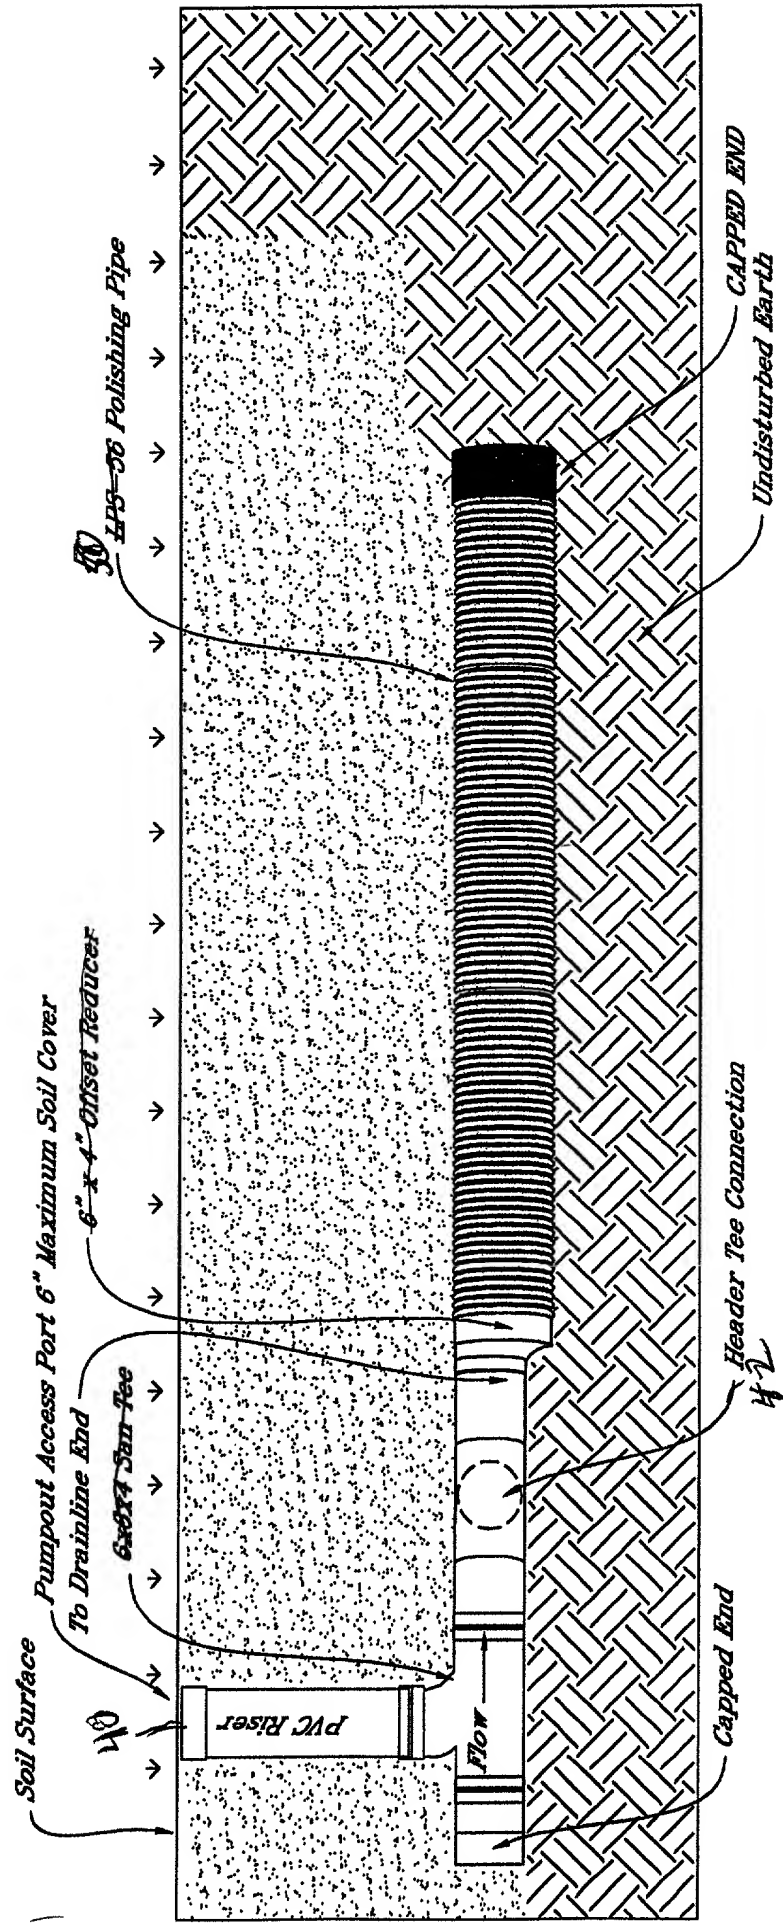


FIG. 17

100-101 2738660

